




**NOTES:**

1. 1,000 lbs. WORKING LOAD IN ANY DIRECTION.
2. ASSEMBLY SHOWN IS CAST IN FULLY EMBEDDED IN REINFORCED CONCRETE SLAB.
3. MINIMUM CONCRETE SLAB THICKNESS IS 7".
4. MINIMUM CONCRETE EMBEDMENT TO BE 6".
5. NAIL PLATES TO BE CAST FLUSH OR SLIGHTLY BELOW FACE OF CONCRETE.

**IMPORTANT:**

1. THE SAFETY ANCHOR HAS BEEN DESIGNED TO ENSURE THAT FRACTURE OR DETACHMENT DOES NOT OCCUR WITH A 5,000 lbs. (22.2 KN) LOAD.
2. IT IS THE RESPONSIBILITY OF THE STRUCTURAL ENGINEER FOR THE OVERALL PROJECT TO ENSURE THAT THE STRUCTURE ON WHICH THE SAFETY EQUIPMENT BY PRO-BEL IS INSTALLED, IS REINFORCED TO WITHSTAND THE LOADS INDICATED ON THIS DRAWING.

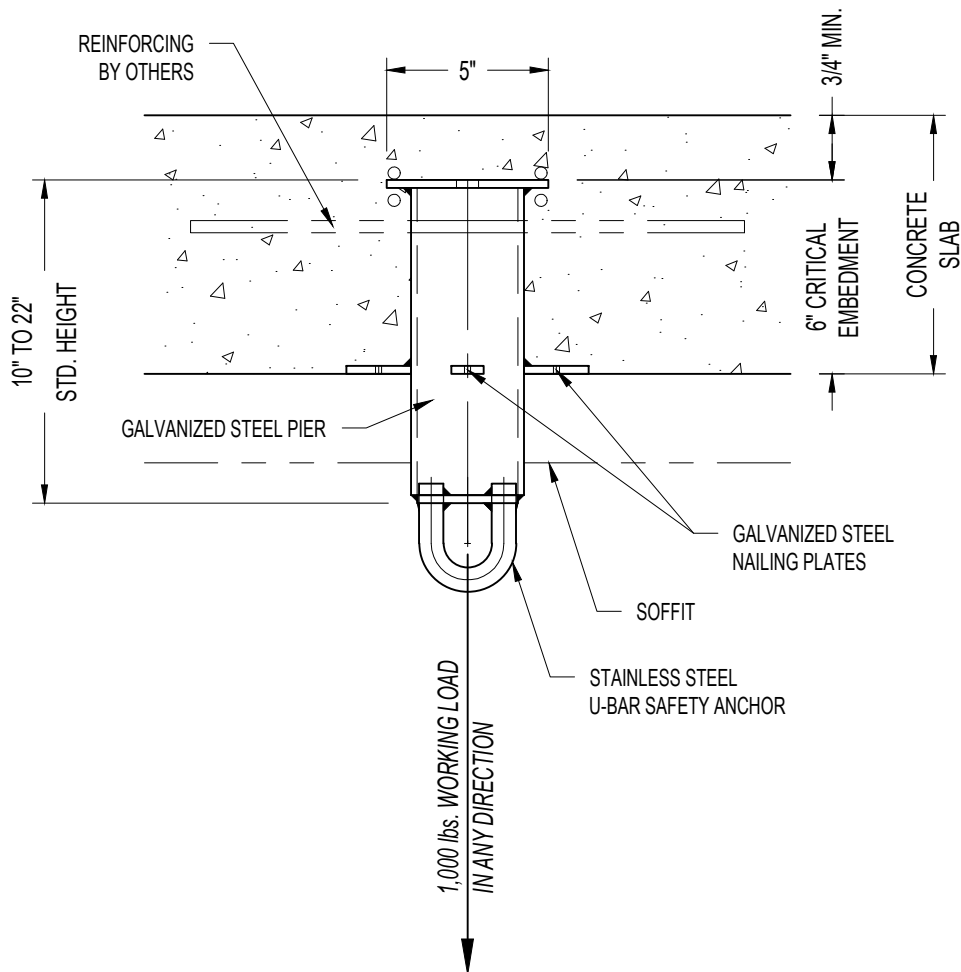

**PBE74EBDNP: CAST IN FULLY EMBEDDED SOFFIT ANCHOR**