


NOTES:

- 1,350 lbs. WORKING LOAD PERPENDICULAR TO HLL CABLE (WHEN USING VERTIC SHOCK ABSORBER- ABS600).
- ASSEMBLY SHOWN IS 12", 15" & 18" HIGH MODELS FOR STANDARD SLAB THICKNESS OF 4", 6" & 8".
- ASSEMBLY NOT TO BE USED FOR COMPOSITE CONCRETE AND METAL DECKING.
- ASSEMBLY SHOWN WITH CONVENTIONAL SINGLE PLY ROOFING (BY OTHERS) - NO FLASHING.

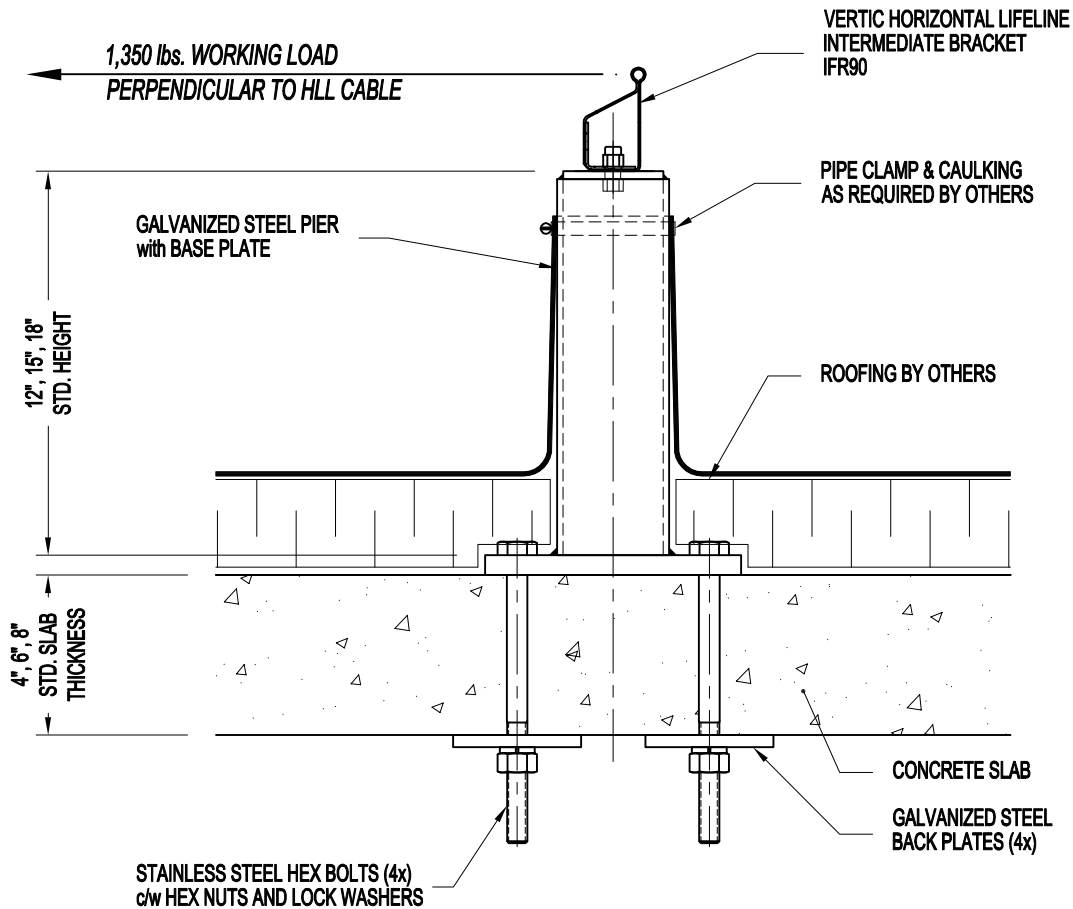

MAX. LIMIT = 24"

IMPORTANT:

- HORIZONTAL LIFELINE ANCHORS ARE DESIGNED TO A MAXIMUM FORCE OF 1,350 lbs. (6.0 KN) WHEN USING VERTIC SHOCK ABSORBER (ABS600), WITH A FACTOR OF SAFETY OF 2 WITHOUT ANY PERMANENT DEFORMATION, FRACTURE OR DETACHMENT.
- IT IS THE RESPONSIBILITY OF THE STRUCTURAL ENGINEER FOR THE OVERALL PROJECT TO ENSURE THAT THE STRUCTURE ON WHICH THE SAFETY EQUIPMENT BY PRO-BEL IS INSTALLED, IS REINFORCED TO WITHSTAND THE LOADS INDICATED ON THIS DRAWING.



PRO-BEL ENTERPRISES LTD.
765 WESTNEY ROAD S., AJAX, ONTARIO L1S 6W1
TEL: (905) 427-0616 FAX: (905) 427-2545
1(800) 461-0575
VISIT OUR WEBSITE @ WWW.PRO-BEL.CA

PRO-BEL DESIGNS, MANUFACTURES, AND INSTALLS PRE-ENGINEERED WINDOW CLEANING/SUSPENDED MAINTENANCE EQUIPMENT & FALL PROTECTION SYSTEMS

- ROOF & WALL ANCHORS
- OUTRIGGER BEAMS
- POWERED PLATFORMS
- RIGGING SLEEVES
- DAVITS
- HORIZONTAL LIFELINE SYSTEMS
- MONORAIL SYSTEMS
- ROOF CARS
- GANTRIES
- LADDERS & GUARDRAILS
- MATERIALS WINCH-HOISTS
- STABILIZATION SYSTEMS & more....