


**NOTES:**

1. 1,000 lbs. WORKING LOAD IN ANY DIRECTION.
2. ASSEMBLY SHOWN IS 12", 15", 18" HIGH MODELS FOR WELDING TO EMBED PLATE CAST IN STANDARD HOLLOW CORE SLAB.
3. ASSEMBLY SHOWN WITH CONVENTIONAL SINGLE PLY ROOFING (BY OTHERS).

**IMPORTANT:**

1. FALL ARREST SAFETY ANCHORS ARE DESIGNED TO A TYPICAL MAXIMUM FALL ARREST FORCE OF 1,800 lbs. (8.0 KN) WHEN WEARING A BODY HARNESS, WITH A FACTOR OF SAFETY OF 2 WITHOUT ANY PERMANENT DEFORMATION, AND TO 5,000 lbs. (22.2 KN) AGAINST FRACTURE OR DETACHMENT.
2. IT IS THE RESPONSIBILITY OF THE STRUCTURAL ENGINEER FOR THE OVERALL PROJECT TO ENSURE THAT THE STRUCTURE ON WHICH THE SAFETY EQUIPMENT BY PRO-BEL IS INSTALLED, IS REINFORCED TO WITHSTAND THE LOADS INDICATED ON THIS DRAWING.

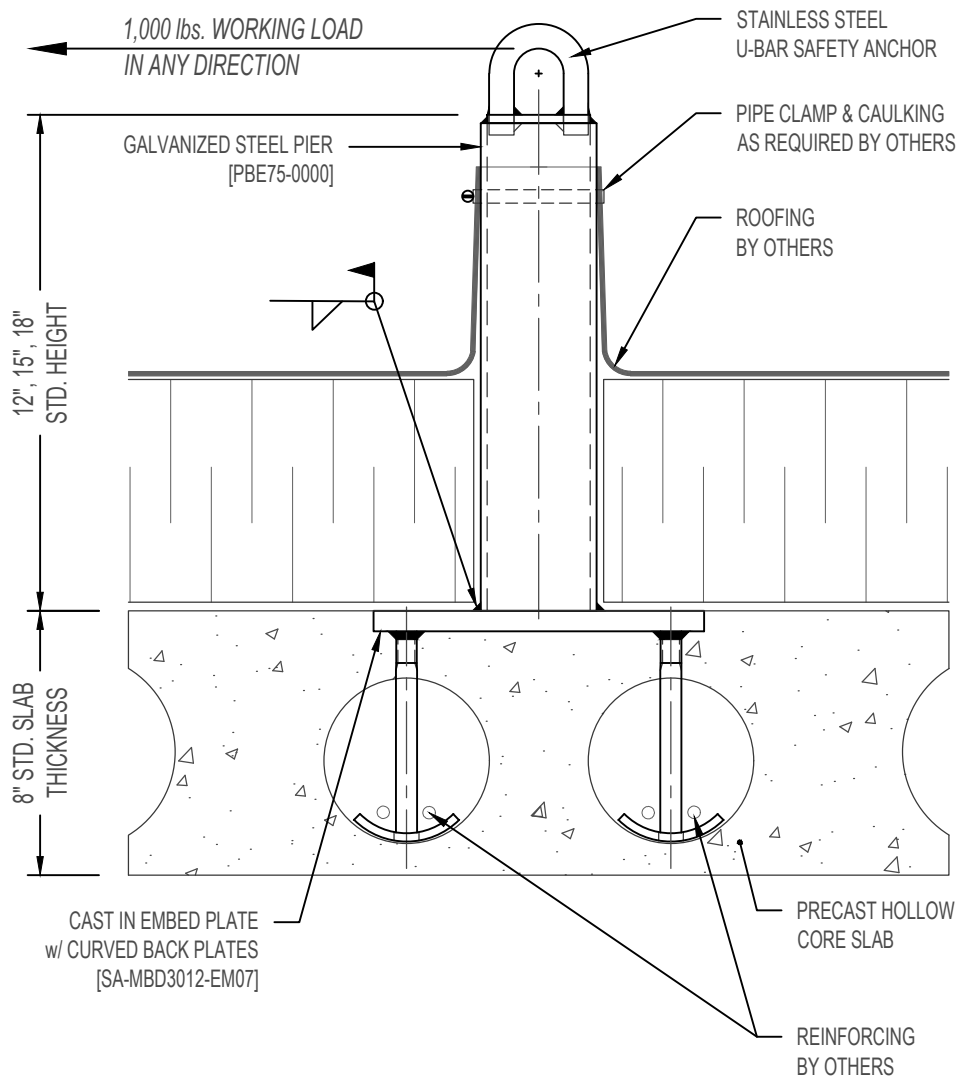

MAX. LIMIT = 18"

**PBE94-00U4: WELD TO EMBED PLATE [CURVED PLATES] ROOF ANCHOR**