


NOTES:

1. 1,000 lbs. WORKING LOAD IN ANY DIRECTION.
2. ASSEMBLY SHOWN IS 12" TO 18" (ABOVE SLAB) HEIGHT MODELS.
3. ASSEMBLY SHOWN WITH CONVENTIONAL SINGLE PLY ROOFING (BY OTHERS) - NO FLASHING.
4. ANCHOR BASE PLATE HAS TO BE PLACED ON TOP OF BOTTOM REINFORCING BARS BEFORE CASTING.
5. ASSEMBLY SHOWN IS FOR (6 1/2" TO 8") CONCRETE SLAB ONLY. SPECIAL MODEL REQUIRED FOR (> 8") SLAB.

IMPORTANT:

1. THE SAFETY ANCHOR HAS BEEN DESIGNED TO ENSURE THAT FRACTURE OR DETACHMENT DOES NOT OCCUR WITH A 5,000 lbs. (22.2 KN) LOAD.
2. IT IS THE RESPONSIBILITY OF THE STRUCTURAL ENGINEER FOR THE OVERALL PROJECT TO ENSURE THAT THE STRUCTURE ON WHICH THE SAFETY EQUIPMENT BY PRO-BEL IS INSTALLED, IS REINFORCED TO WITHSTAND THE LOADS INDICATED ON THIS DRAWING.

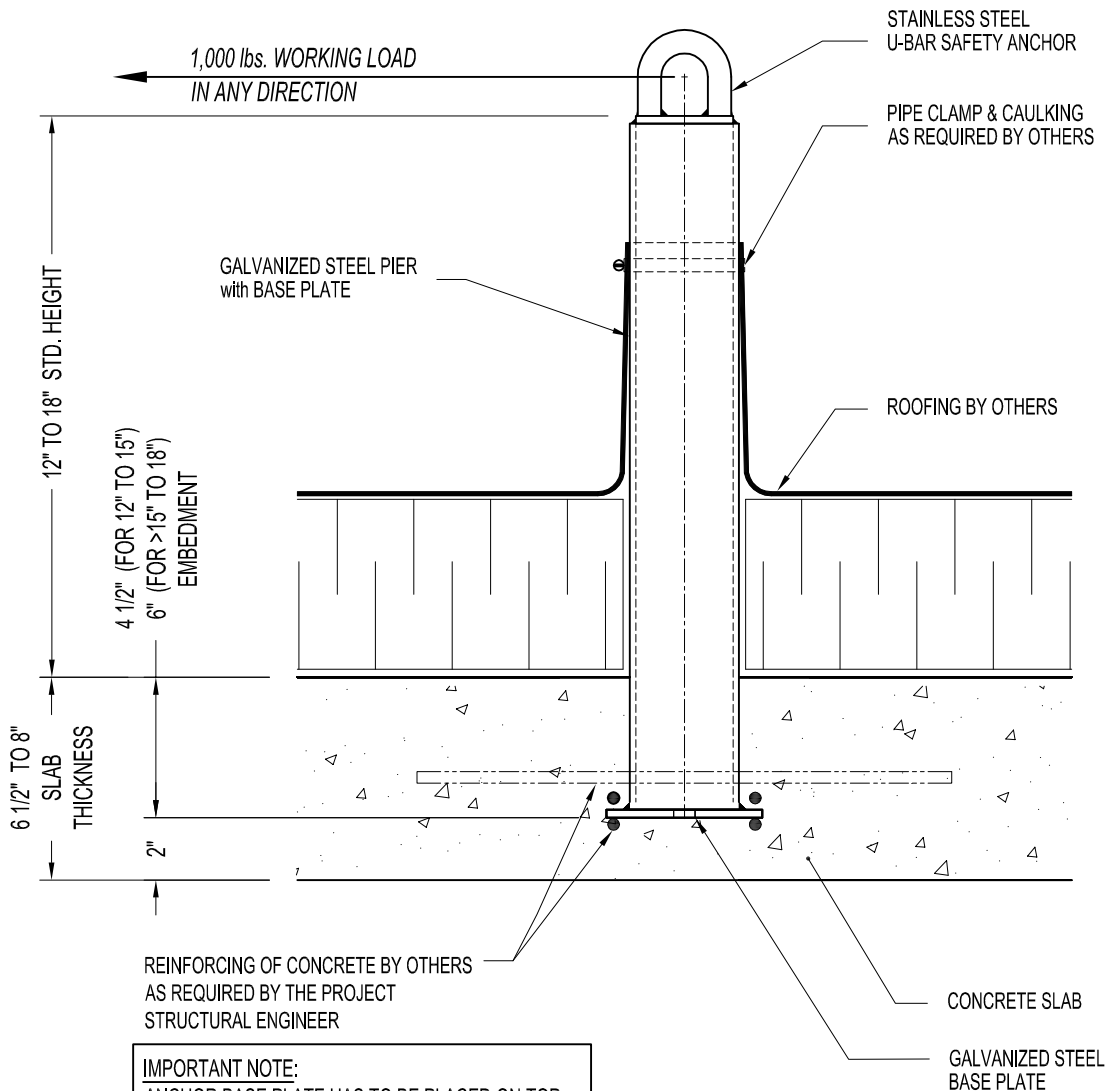

IMPORTANT NOTE:
ANCHOR BASE PLATE HAS TO BE PLACED ON TOP
OF BOTTOM REINFORCING BARS BEFORE CASTING.

PBE74EBD: FULLY EMBEDDED IN CONCRETE SLAB ROOF ANCHOR