

Pro-Bel Group Ltd.

765 Westney Road South Ajax, Ontario, Canada L1S 6W1 Toll Free: (800) 461-0575 Tel: (905)-427-0616 Fax: (905)-427-2545


Email: info@pro-belgroup.com

NOTES:

- 1. 1.000 lbs. WORKING LOAD.
- 2. ASSEMBLY SHOWN IS FOR SINGLE SUSPENSION. WORKER'S LIFELINE TO BE TIED TO INDEPENDENT ANCHOR.
- 3. THE INBOARD END OF THE OUTRIGGER SHALL NOT BE LESS THAN 1 TIMES THE OUTBOARD END IN LENGTH (L≥R).
- 4. ASSEMBLY SHOWN IS FOR MAX. REACH OF 5'-6".

IMPORTANT:

- 1. OUTRIGGERS ARE DESIGNED TO A TYPICAL SUSPENSION WORKING LOAD OF 1,000 lbs. (4.5 KN), WITH A FACTOR OF SAFETY OF 4 AGAINST FRACTURE OR DETACHMENT.
- 2. IT IS THE RESPONSIBILITY OF THE STRUCTURAL ENGINEER FOR THE OVERALL PROJECT TO ENSURE THAT THE STRUCTURE ON WHICH THE SAFETY EQUIPMENT BY PRO-BEL IS INSTALLED, IS REINFORCED TO WITHSTAND THE LOADS INDICATED ON THIS DRAWING.

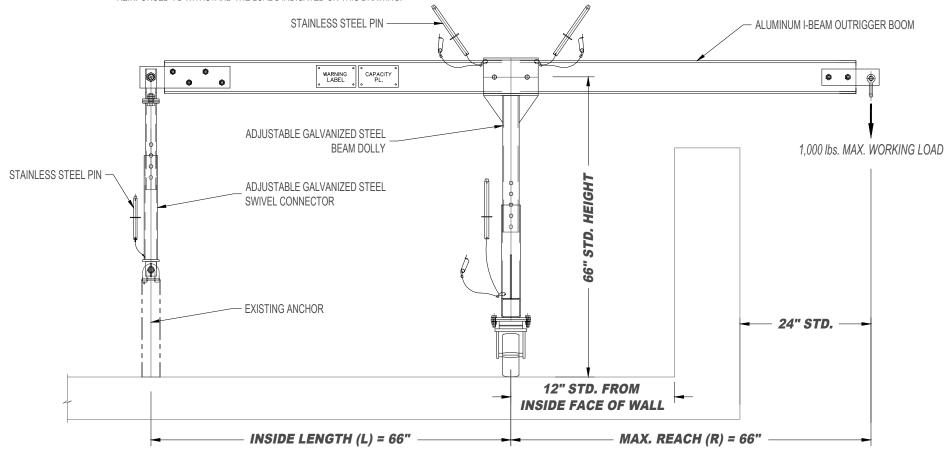

A-OR-0A12: PORTABLE PINNED DOWN OUTRIGGER BEAM w/ ADJUSTABLE DOLLY (FLAT)