


NOTES:

1. 1,000 lbs. WORKING LOAD IN VERTICAL DIRECTION.
2. ASSEMBLY SHOWN IS 1-BAR SLEEVE DESIGN. WORKER'S LIFELINE TO BE TIED TO INDEPENDENT ANCHOR.
3. MINIMUM CONCRETE SLAB THICKNESS IS 8".
4. MAXIMUM CANTILEVER DISTANCE (L1) IS 30". MAXIMUM DISTANCE BETWEEN 2 POSTS (L2) IS 60".

IMPORTANT:

1. RIGGING SLEEVES ARE DESIGNED TO A TYPICAL SUSPENSION WORKING LOAD OF 1,000 lbs. (4.5 kN), WITH A FACTOR OF SAFETY OF 4 AGAINST FRACTURE OR DETACHMENT.
2. IT IS THE RESPONSIBILITY OF THE STRUCTURAL ENGINEER FOR THE OVERALL PROJECT TO ENSURE THAT THE STRUCTURE ON WHICH THE SAFETY EQUIPMENT BY PRO-BEL IS INSTALLED, IS REINFORCED TO WITHSTAND THE LOADS INDICATED ON THIS DRAWING.

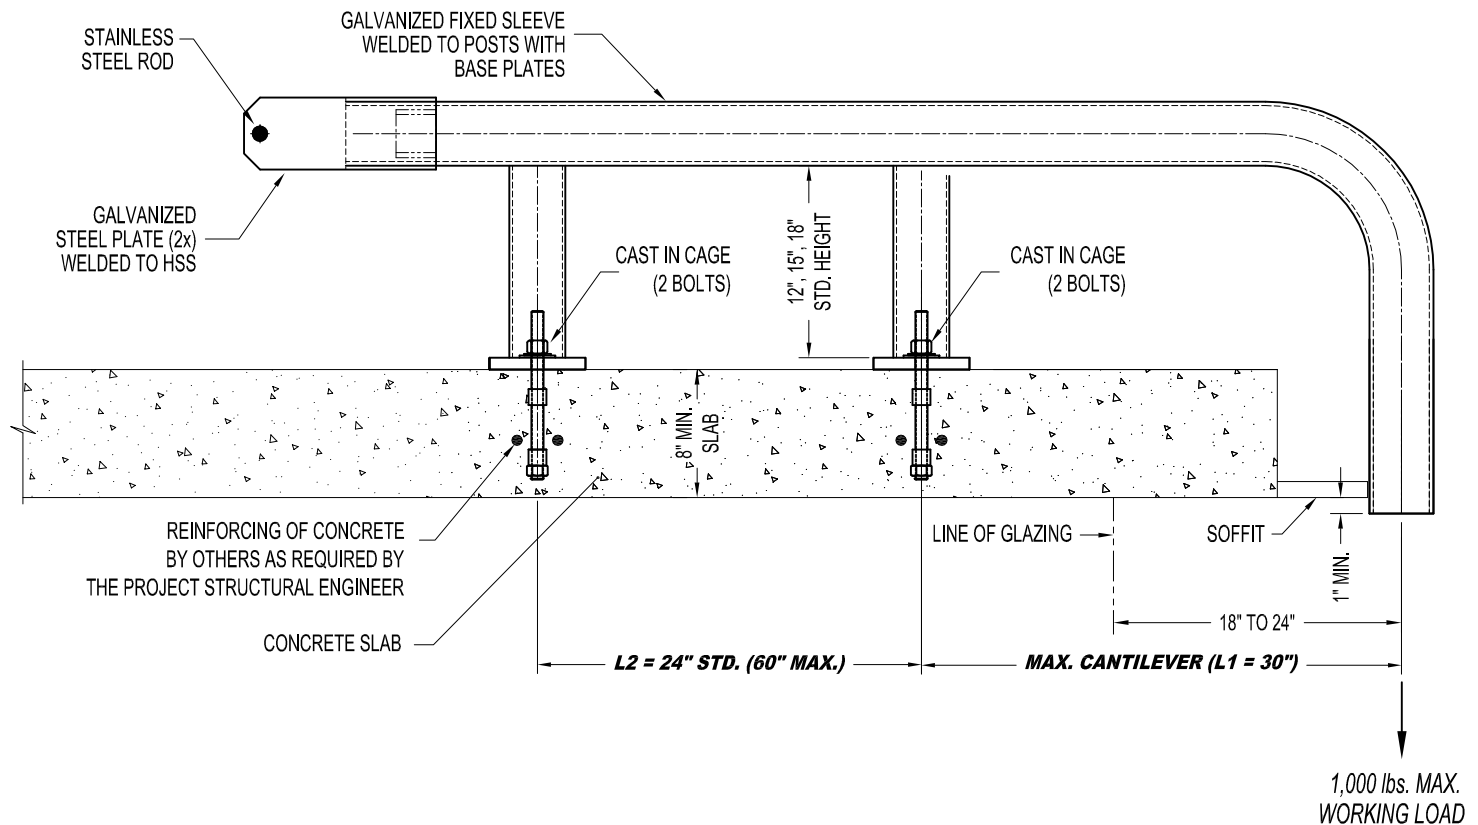


A-RSC14132: CAST IN CAGE - CURVED RIGGING SLEEVE (4" O.D. FIXED SLEEVE) WITH 2 POSTS

NOTES:

1. 1,000 lbs. WORKING LOAD IN VERTICAL DIRECTION.
2. ASSEMBLY SHOWN IS 1-BAR SLEEVE DESIGN. WORKER'S LIFELINE TO BE TIED TO INDEPENDENT ANCHOR.
3. MINIMUM CONCRETE SLAB THICKNESS IS 8".
4. MAXIMUM CANTILEVER DISTANCE (L1) IS 30". MAXIMUM DISTANCE BETWEEN 2 POSTS (L2) IS 60".

IMPORTANT:

1. RIGGING SLEEVES ARE DESIGNED TO A TYPICAL SUSPENSION WORKING LOAD OF 1,000 lbs. (4.5 kN), WITH A FACTOR OF SAFETY OF 4 AGAINST FRACTURE OR DETACHMENT.
2. IT IS THE RESPONSIBILITY OF THE STRUCTURAL ENGINEER FOR THE OVERALL PROJECT TO ENSURE THAT THE STRUCTURE ON WHICH THE SAFETY EQUIPMENT BY PRO-BEL IS INSTALLED, IS REINFORCED TO WITHSTAND THE LOADS INDICATED ON THIS DRAWING.

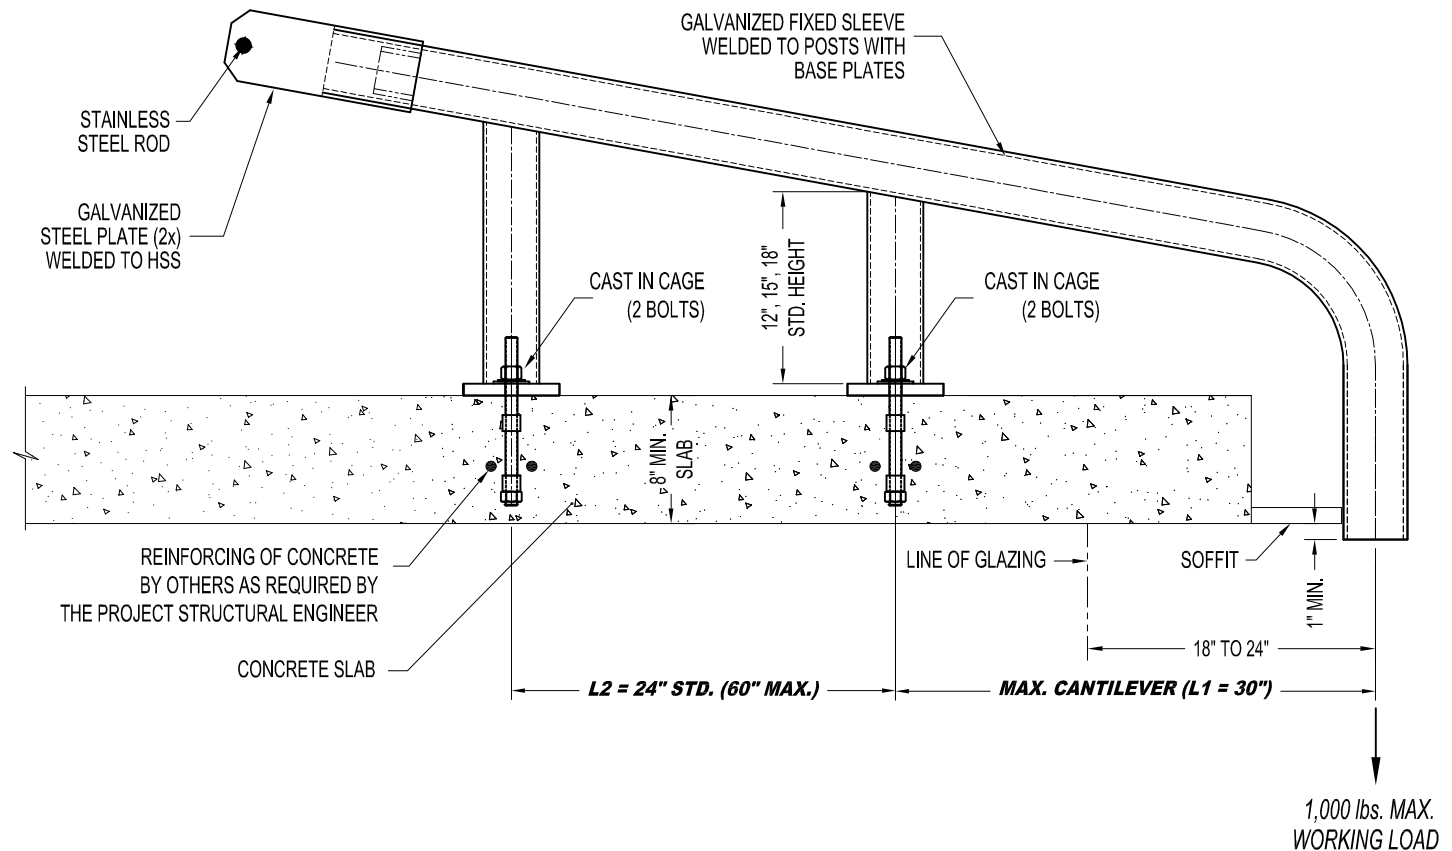

A-RSC04132: CAST IN CAGE - CURVED RIGGING SLEEVE (4" O.D. FIXED SLEEVE) WITH 2 POSTS